



ALL-OUT SHOW OFF™

CORE.

Inside you will find probably the most dynamic core in this price point. When we set out to create a new part for the HP2 line we knew we wanted an RG value of 2.55 and a differential of .045, needless to say we hit our mark and the motion is unmatched!

Hotshot™ Core



	16lb	15lb	14lb	13lb	12lb	11lb	10lb
RG VALUE:	2.55	2.55	2.55	2.63	2.65	2.73	2.77
RG DIFFERENTIAL:	0.045	0.045	0.045	0.009	0.011	0.012	0.015

COVER.

On the outside you will find the Stoked™ Hybrid reactive cover which consists of 2 parts solid and 1 part pearl. This will provide ease through the heads but provide super stability on the backend off friction due to the extra solid in the cover.

Factory Finish: 1500-grit Polished

Flare Potential: Medium

Coverstock: Stoked™ Hybrid Reactive


Color: Purple / Neon Green / White

Hardness: 73-75 on D-Scale

CONDITION.

This ball was built to battle those Medium type conditions and provide an option on a variety of patterns if there is too much friction. Even though it comes factory shined, it can always be sanded to battle a little heavier oil.

Lane Condition - Medium

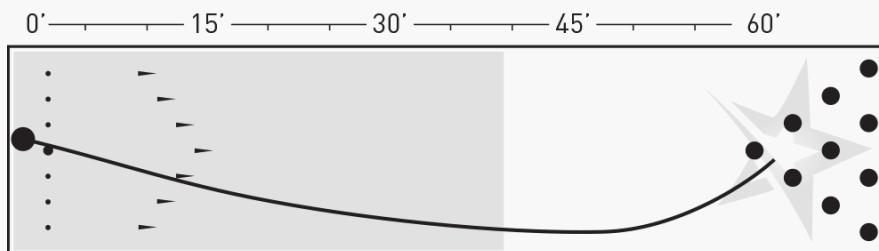

The ball path represents Roto Grip's bowling ball tester. Ask your pro shop professional how this ball will work for you.



HOW TO KEEP YOUR NEW BALL REACTING STRONG

We strongly believe that preventative maintenance is the key to a cover's longevity.

WHY? The ball's ability to absorb lane oil into the pores helps to keep a dry ball surface in contact with the lane for more friction, creating added hook. Over a period of time, the bowling ball's performance will slowly deteriorate due to oil absorption and dirt build up on the ball's surface.

In addition to using a clean and dry Roto Grip Shammy in competition, we highly recommend that a bowling ball cleaner be used immediately afterward to further clean the ball's cover. If a ball is used and then put away without cleaning, the oil and dirt will have a greater chance to be absorbed deeper into the cover.

We hear time and time again from people who have lost hook in their equipment and swear they clean it on a regular basis. Only when the question is asked about when they clean their equipment does the real problem come to light; cleaning a ball just before use removes only a very fine layer while the deeper trapped oil and dirt still remain from your last session. Below is our recommended procedure to maintain your ball's performance:

1. Use a clean, dry Roto Grip Shammy during competition
2. At the end of the session, use Storm Reacta Foam™ and spray liberally over the entire surface of the ball
3. Rub your hands over the surface of the ball in a scrubbing motion for 15-20 seconds
4. Towel off the ball until dry

This process will assist the degreasing agent in the cleaner to draw oil and dirt out of the pores; the hand-action helps break down the oil and dirt, making it easier to be removed with a towel.

Ball Maintenance Checklist

WHEN	POLISHED BALLS	DULL BALLS
<i>Between Shots</i>	<i>Wipe with Roto Grip Shammy</i>	<i>Wipe with Roto Grip Shammy</i>
<i>After Bowling</i>	<i>Clean with Storm Reacta Foam</i>	<i>Clean with Storm Reacta Foam</i>
<i>Every 10 Games</i>	<i>Re-polish surface with Storm Reacta Shine™</i>	<i>Scuff surface with Abralon® pad to maintain original reaction</i>
<i>Every 30 Games</i>	<i>Scuff surface with Abralon and re-polish with Storm Reacta Shine</i>	
<i>Every 60 Games</i>	<i>Ball is due for full resurface process</i>	

FOR MORE INFORMATION BE SURE TO CHECK OUT ROTOGRIP.COM

AND FOR MORE INFORMATION ABOUT OUR AWESOME APPAREL & ACCESSORIES
BE SURE TO CHECK OUT ROTOGEAR.COM