



HP2<sup>™</sup>  
HOOK POTENTIAL

# WINNER<sup>™</sup> Solid



## CORE.

A proven "winner" in the first version, the Altered Hotshot<sup>™</sup> Core provides the length and change of direction we were needing in the HP2 line.

### Altered Hotshot<sup>™</sup> Core



	16lb	15lb	14lb	13lb	12lb	11lb	10lb
RG VALUE:	2.54	2.54	2.54	2.63	2.65	2.73	2.77
RG DIFFERENTIAL:	0.051	0.054	0.050	0.009	0.011	0.012	0.015

## COVER.

Just like the original Winner<sup>™</sup> we calculated many tests to dial in the new VTC-S18<sup>™</sup> Solid Coverstock. The major key was getting the ratios of materials just right to provide traction throughout the lane without gripping too early.

Factory Finish: 3000-grit Pad

Flare Potential: Medium

Coverstock: VTC-S18<sup>™</sup> Solid Reactive


Color: Black / Purple / Green

Hardness: 73-75 on D-Scale

## CONDITION.

This ball will excell on a little bit more oil for sure. Compared to the original Show Off<sup>™</sup>, the new Winner Solid will clear the front of the lane just a bit easier, yet will provide plenty of backend motion for a solid coverstock ball. I mean how can you go wrong with a ball named after what you are trying accomplish? Because we all know, winning never gets old!

Lane Condition - Medium to Medium/Heavy

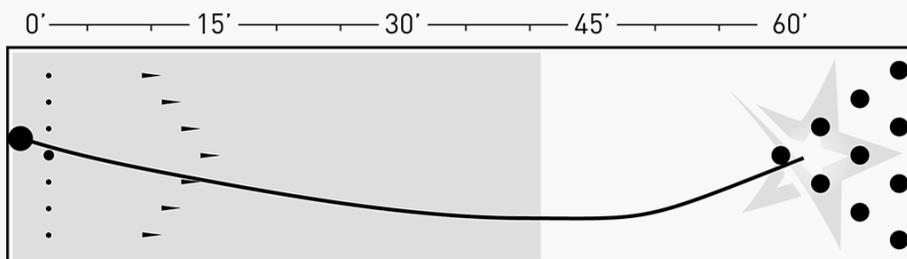

The ball path represents Roto Grip's bowling ball tester. Ask your pro shop professional how this ball will work for you.



## HOW TO KEEP YOUR NEW BALL REACTING STRONG

We strongly believe that preventative maintenance is the key to a cover's longevity.

WHY? The ball's ability to absorb lane oil into the pores helps to keep a dry ball surface in contact with the lane for more friction, creating added hook. Over a period of time, the bowling ball's performance will slowly deteriorate due to oil absorption and dirt build up on the ball's surface.

In addition to using a clean and dry Roto Grip Shammy in competition, we highly recommend that a bowling ball cleaner be used immediately afterward to further clean the ball's cover. If a ball is used and then put away without cleaning, the oil and dirt will have a greater chance to be absorbed deeper into the cover.

We hear time and time again from people who have lost hook in their equipment and swear they clean it on a regular basis. Only when the question is asked about when they clean their equipment does the real problem come to light; cleaning a ball just before use removes only a very fine layer while the deeper trapped oil and dirt still remain from your last session. Below is our recommended procedure to maintain your ball's performance:

1. Use a clean, dry Roto Grip Shammy during competition
2. At the end of the session, use Storm Reacta Foam™ and spray liberally over the entire surface of the ball
3. Rub your hands over the surface of the ball in a scrubbing motion for 15-20 seconds
4. Towel off the ball until dry

This process will assist the degreasing agent in the cleaner to draw oil and dirt out of the pores; the hand-action helps break down the oil and dirt, making it easier to be removed with a towel.

### Ball Maintenance Checklist

WHEN	POLISHED BALLS	DULL BALLS
<i>Between Shots</i>	<i>Wipe with Roto Grip Shammy</i>	<i>Wipe with Roto Grip Shammy</i>
<i>After Bowling</i>	<i>Clean with Storm Reacta Foam</i>	<i>Clean with Storm Reacta Foam</i>
<i>Every 10 Games</i>	<i>Re-polish surface with Storm Reacta Shine™</i>	<i>Scuff surface with Abralon® pad to maintain original reaction</i>
<i>Every 30 Games</i>	<i>Scuff surface with Abralon and re-polish with Storm Reacta Shine</i>	
<i>Every 60 Games</i>	<i>Ball is due for full resurface process</i>	

FOR MORE INFORMATION BE SURE TO CHECK OUT [ROTOGRIP.COM](http://ROTOGRIP.COM)

AND FOR MORE INFORMATION ABOUT OUR AWESOME APPAREL & ACCESSORIES  
BE SURE TO CHECK OUT [ROTOGEAR.COM](http://ROTOGEAR.COM)